

PROCEDURE 3 : Network Configuration

You can use this procedure on following cases :

- Your production data are not anymore visible on internet
- You have changed your internet access box or have move to another provider
- You cannot access the local web interface of the logger on your local network.

1/ Test 1


To do :

- Check all cables between the Solar-Log and your router, to do it, disconnect and reconnect the RJ45 cable or try if possible with a new one.
- If you are using Power Line Packages, please disconnect them and connect them again.

Wait for a day to see if everything is working fine again. If not go to test 2.


2/ Test 2

Please download from our website toolkit. To do so, go to : <https://www.sundays-data.com/telechargements>.

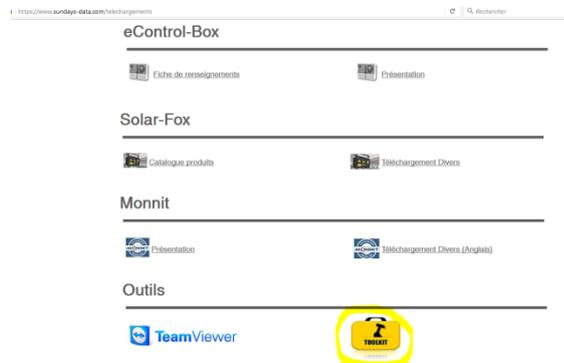

Click on the toolkit icon. Open it , install it on a PC or laptop connected to the same network than the Solar-Log and click on  to scan the network and to find the Sola-Log.

If you do not see any IP adress like on the picture bellow :

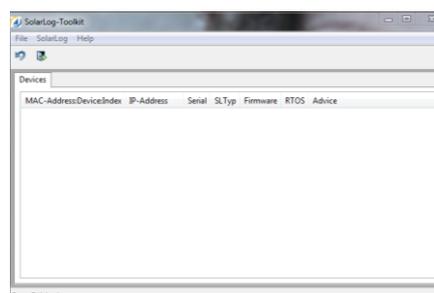


This means that the Solar-Log is not active on your local network. Several reasons can explain that :

- You have installed toolkit on laptop which is not connected to the same network then the Solar-Log
- The Solar-Log is on the same network but there is no communication between it and the router.
- The RJ45 port of the router is not working
- The RJ45 port of the Solar-Log is not working


Please contact us for a deeper diagnostic of your system.

If you can see several IP addresses like bellow :

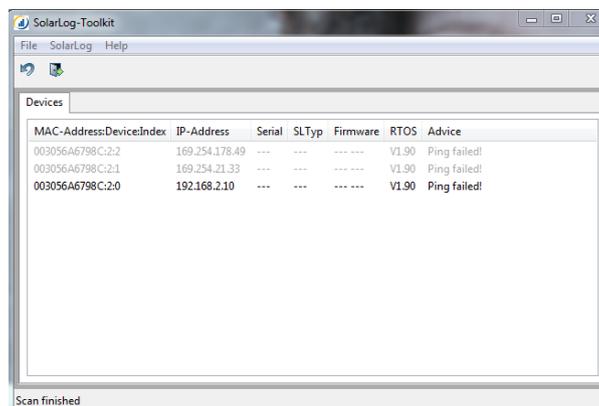

Please do the following :

- Do a right click on the last black IP which has a MAC address finishing with 2:0
- Choose configure ip
- Select Use DHCP
- Click on OK

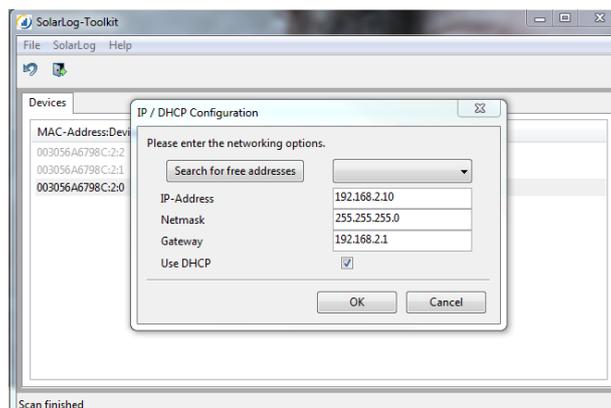

Wait for a day to see if everything is working fine again.

If you are still facing issues, please contact us for a deeper diagnostic of your system.